



# RANGE PERFORMANCES

Range performances for SR-, F-, PT-, and D-Series with 320 x 240 pixels detector

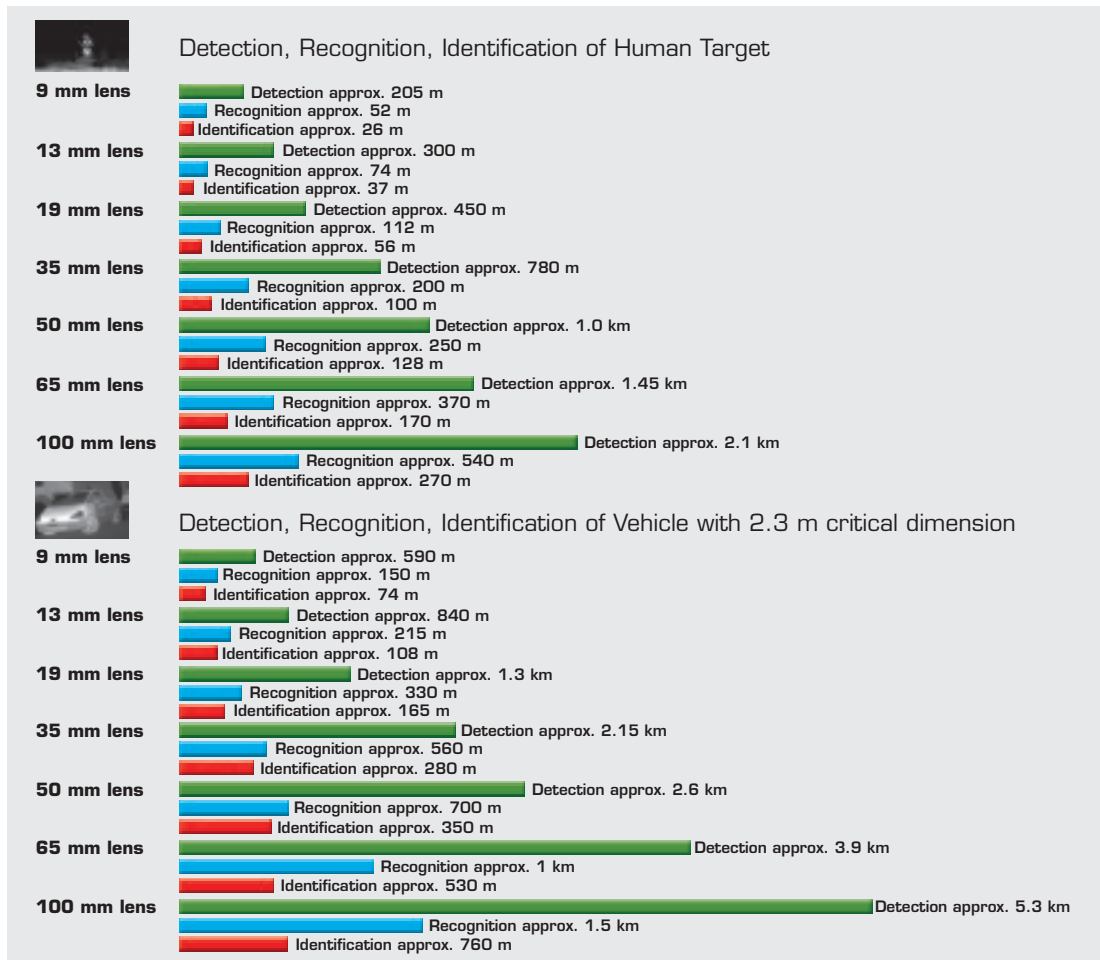

Range performances for SR-, F-, PT- and D-Series with 640 x 480 pixels detector

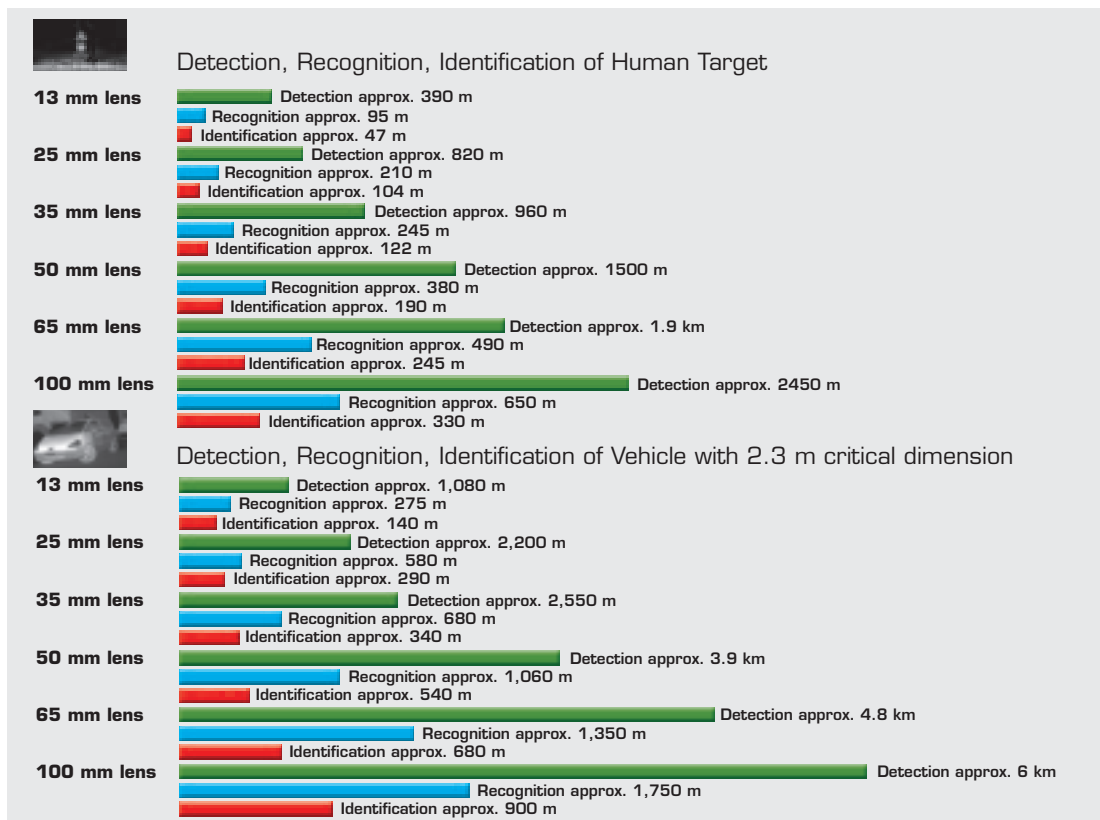

Actual range may vary depending on camera set-up, environmental conditions, user experience and type of monitor or display used. Assumptions: 50 % probability of achieving objective at specified distance given 2°C temperature difference and 0.85 / km atmospheric attenuation factor.